

## KEY FEATURES

- Din Rail Switching Power Supply
- Universal Input: 90-264 VAC
- Single Output
- 5 VDC to 24 VDC Output
- 3000 VAC Input to Output Isolation
- 2-Year Product Warranty





## ELECTRICAL SPECIFICATIONS

Model No.		AQS75D-5S	AQS75D-12S	AQS75D-15S	AQS75D-24S
Max Output Wattage (W)		60W	75W	75W	75W
Input	Voltage	90-264 VAC or 120-370 VDC			
	Frequency (Hz)	47-63 Hz			
	Current (Full load)	2 A max. (115 VAC) / 1 A max. (230 VAC)			
	Inrush Current (<2ms)	20 A max. (115 VAC) / 40 A max. (230 VAC)			
	Leakage Current	3.5 mA max.			
Output	Voltage (V.DC.)	5V	12V	15V	24V
	Voltage Accuracy	±2%			
	Current (mA) max	12,000	6,250	5,000	3,130
	Line Regulation (LL-HL) (typ.)	±1%			
	Load Regulation (5-100%) (typ.)	±1%			
	Minimum Load	1%			
	Maximum Capacitive Load	470-23,000µF depending on model			
	Ripple & Noise (Vp-p)	100 mV max.	150 mV max.	200 mV max.	300 mV max.
	Efficiency	73%	80%	80%	80%
	Hold-up Time	18 ms min.			
Protection	Over Power Protection	Auto recovery			
	Over Voltage Protection	Zener diode clamp			
	Short Circuit Protection	Auto recovery			
Isolation	Input-Output (V.AC)	3000V			
	Input-FG (V.AC)	1500V			
	Output-FG (V.AC)	500V			
Environment	Operating Temperature	-25°C...+70°C (with derating)			
	Storage Temperature	-40°C...+85°C			
	Temperature Coefficient	±0.02%/°C			
	Humidity	95% RH			
	MTBF	>130,000 h @ 25°C (MIL-HDBK-217F)			
Physical	Dimension (L x W x H)	4.15 x 2.3 x 1.5 Inches ( 105.3 x 58.2 x 38.1 mm ) Tolerance ±0.5 mm			
	Weight				
	Cooling Method	Free air convection			
Safety	Agency Approvals	CE, UL			
EMC	EMI (Conducted & Radiated Emission)	EN 55022 class B			
	EMS (Noise Immunity)	EN 55024			

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.


Measured with 0.1µ 50V // 47µ 50V Ceramic Cap. Cross to output

**MECHANICAL DIMENSION ( Top View )**

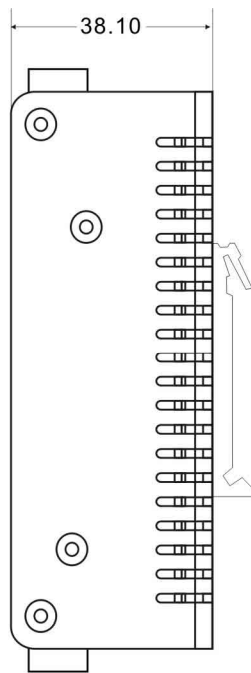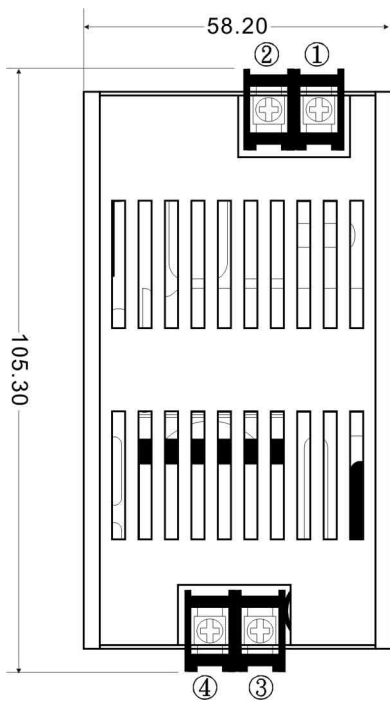

PIN#	SINGLE
1	AC IN (N)
2	AC IN (L)
3	+DC OUT
4	-DC OUT

**DERATING**

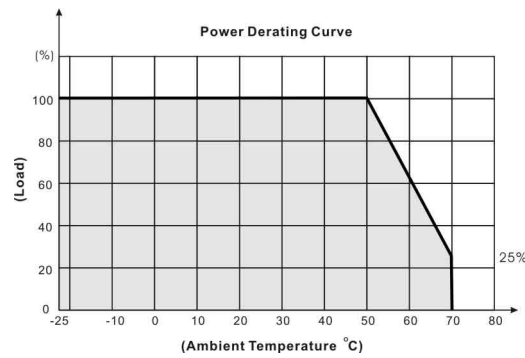

**BLOCK DIAGRAM**

Single Output

