




ADAPTER-30W

Green Mode

Meet CEC Regulations & RoHS Compliance
No Load Power Consumption less than 0.5W

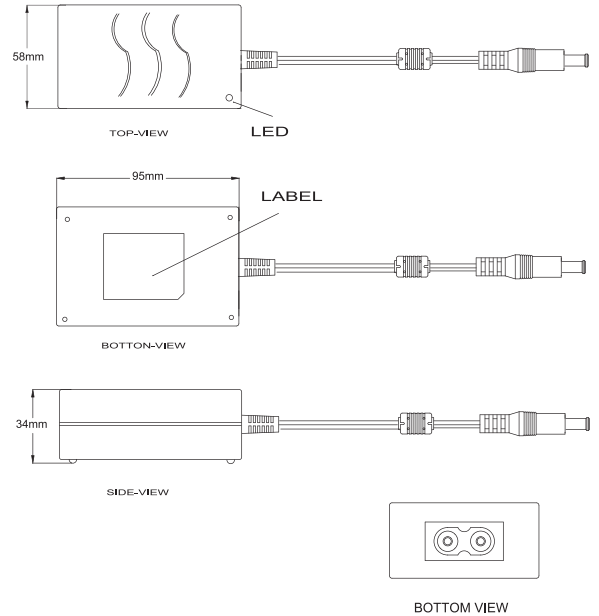

FEATURE

Desktop	IEC 320 / C8
Input Range	90~264V/47~63 Hz, 0.7A max.
Output	5V~24V / 1.25A~5A, Max. 30W
Efficiency	80% typical
Protection	Short Circuit Protection, Over Voltage Protection. Over Current Protection.
Leakage current	less than 0.25mA
Load Regulation	± 5%
M.T.B.F.	50,000 hours min. at 25°C, full load
Cable type	UL2468 / 18AWG or 20AWG
Dimension	95(L) x 58(W) x 34(H) mm
Weight	230 g (reference)

APPLICATION

Play station, Computer, MODEM, Printer,
Telecommunication, Wireless device, Industrial
controller, OA system.

SAFTY & EMI

Safety UL/ cUL/GS/CB/PSE/BSMI
EMI CE Class B; Conduction & Radiation MEET

ENVIRONMENTAL

Operating Temperature 0~ +40°C
Storage Temperature - 20~ +60°C
Relative Humidity (operating) 20~80% RH
(storage) 10~90% RH

RULE OF THE MODEL NAME

MODEL NAME	O/P VOLTAGE	O/P CURRENT	WATT	INLET
STD-0505P	5V	5A	25W	2 PIN
STD-0903P	9V	3A	27W	2 PIN
STD-1225P	12V	2.5A	30W	2 PIN
STD-1502P	15V	2A	30W	2 PIN
STD-2412P	24V	1.25A	30W	2 PIN