

### Features:

- Universal AC input / Full range
- Built in active PFC function, PF > 0.90
- +5V / 0.3A auxiliary output
- 150% Peak load Capability
- Constant current limit
- Power OK signal
- Remote ON / OFF, Remote sense function
- Protection: OVP, OLP, OTP, SCP, Fan failure
- 3 years warranty







	MODEL	AK-350-05	AK-350-12	AK-350-15	AK-350-24	AK-350-48	
DC Voltage Range		5V	12V	15V	24V	48V	
	Rated Current	60A	30A	24A	15A	7.5A	
	Current Range	0 ~ 60A	0 ~ 30A	0 ~ 24A	0 ~ 15A	0 ~ 7.5A	
	Rated Power	300W	360W	360W	360W	360W	
	Ripple & Noise (Max.) Note.2	<1% (mVp-p), acco	rding to the rated O	utput Voltage			
Output	Voltage Adj. Range	±10% Typical adjustment by potentiometer					
•		3 ±1.0%					
	Line Regulation	±0.5%					
	Load Regulation	±0.5%					
	Setup, Rise Time	800ms, 60ms at full load					
	Hold Up Time (Typ.)	16ms / 230VAC at full load					
	Voltage Range Note.4						
	Frequency Range	47 ~ 63Hz	370700				
	Power Factor (Typ.)	0.98 / 230VAC, 0.99	) / 115\/\\C at full loc	ad .			
Input	Efficiency (Typ.)	83%	90%	90%	91%	93%	
put	AC Current (Typ.)			30 /0	3170	33 /0	
	Inrush Current (Typ.)	4.0A / 115VAC, 2.0A					
		27A / 115VAC, 54A < 1.0mA / 240VAC	/ 230VAC				
	Leakage Current		the material acctionate many		20/ for record there 200		
		Hiccup mode: when the rated output power is within 105 ~ 150% for more than 3secs.  Constant current limit: > 150% rated power / short circuit					
	Over Load						
				ated output voltage, P		auto-recover re-power on to recover)	
Protection		,					
	Over Voltage	6.0 ~ 6.5V	14.4 ~ 15.6V	18 ~ 19.5V	28.8 ~ 31.2V	57.6 ~ 62.4V	
	5	Protection type: Latch-style (Recovery after reset AC power ON or inhibit)					
	Over Temperature	By detecting primary and secondary heat sink.					
	·	Protection type: Shut down o/p voltage (Recovers automatically after temperature goes down)					
	Auxiliary Power	5V / 0.3A (±3%)					
Function	Remote ON / OFF Control	External switch or N					
	Power OK Signal			on, Max. sink current	: 20mA, Max. drain v	oltage: 40V.	
	Working Temp.	-20 ~ +70°C (Refer	,				
	Working Humidity	20 ~ 90% RH non-c					
Environment	Storage Temp. & Humidity	-40 ~ +85°C, 10 ~ 95% RH					
	Temp. Coefficient	±0.02% / °C (0 ~ 50					
	Vibration	10 ~ 500Hz, 5G 10min. / 1cycle, period for 60min. each along X, Y, Z axes					
		Compliance to IEC 68-2-6, IEC 68-2-64					
	Safety Standards	Certified UL 60950-	·				
		,		5KVAC (2121VDC), (	D/P-FG: 0.5KVAC (70	07VDC), 1min	
Safety & EMC	Isolation Resistance	I/P-O/P, I/P-FG, O/F	P-FG: 100M Ohms /	500VDC			
	EMI Conduction & Radiation	Certified EN 55022					
	Harmonic Current	Certified EN 61000-	-3-2; EN 61000-3-3				
Note.5	-	Certified EN 5502	4; IEC 61000-4-2,	3, 4, 5, 6, 8, 11			
Others	MTBF	74.56K HRS Certific	ed MIL-HDBK-217F				
	Cooling	Load and temperate	ure control fan				
	Dimension (WxHxD)	105x41x199 mm / 4	.134x1.614x7.835 i	nch			
Note	All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uF & 47uF parallel capacitor.  Tolerance: includes setup time tolerance, line regulation and load regulation.  De-rating may apply in low input voltage. Please check the de-rating curve for more details.  The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives.						
	6. This test is done without enclosure.						



## Mechanical Drawings:


Unit:mm[inch]

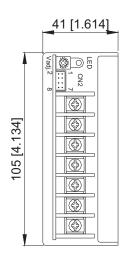

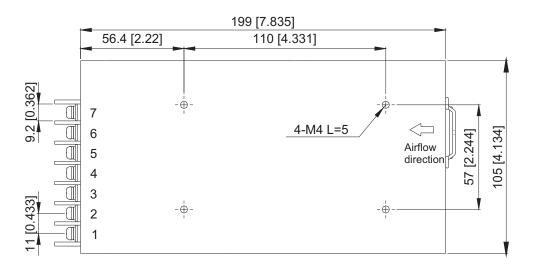

AC Input & DC Output Pin No. Assignment

Pin No.	Assignment
1	AC/L
2	AC/N
3	FG
4,5	-V
6,7	+V

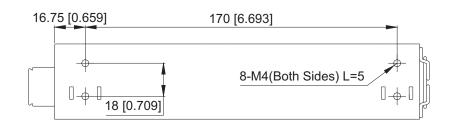

Control pin number assignment (CN2): JST S8B-PHDSS or equivalent


Pin No.	Assignment	Pin No.	Assignment	Mating Housing	Terminal
1	AUX	5	GND		
2	GND	6	EN+	PHDR-08VS	SPHD-002T-P05
3	P-OK	7	VS+	PUDK-0013	SPND-0021-P05
4	EN-	8	VS-		


# **Function Description of CN2:**

Pin No.	Function	Description
1	AUX	+5V / 0.3A auxiliary power
2	GND	Ground
3	P.OK	Power OK
4	EN-	Remote ON/OFF (–)
5	GND	Ground
6	EN+	Remote ON/OFF (+)
7	VS+	Remote voltage sense (+)
8	VS-	Remote voltage sense (–)




## De-rating Curve:

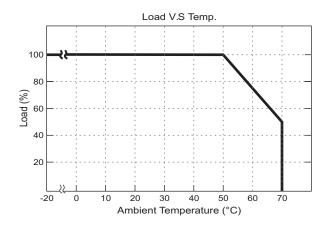

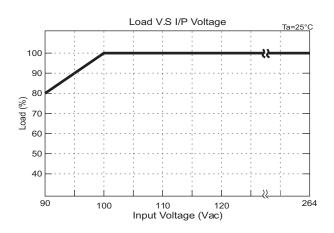


#### Peak Load:

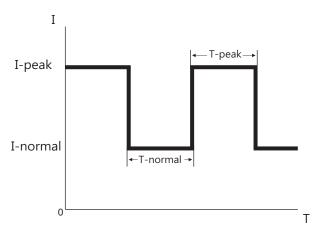


T-PEAK represents the period during which the output current is at 110% to 150% of nominal (shown as I-PEAK). Curve B shows the relationship between the percentage of peak current (I-PEAK) and the allowable duration (T-PEAK).

If the peak current is taken for longer than the allowed duration indicated by curve B, the output current will drop to constant limited current of 105% of nominal.

The unit between peak currents (T-NORMAL) is dependant to the output current drawn between the peaks (I-NORMAL) and curve A shows the relationship between the two. Higher the percentage of the nominal current (I-NORMAL), longer the interval (T-NORMAL) before the next peak current can be drawn.

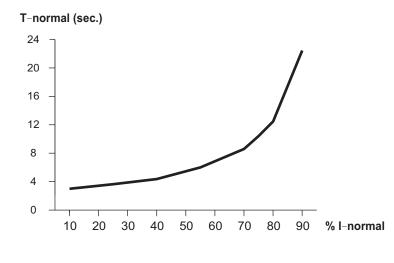


**CURVE A** 

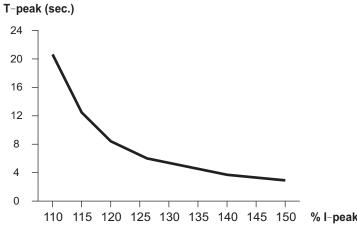


**CURVE B** 




#### 1. Power OK Signal and Auxiliary output

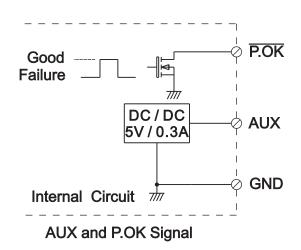

- \*Place an additional capacitor to have a better performance of auxiliary power operation.
- \*The grounding of "AUX" power should be connected to "GND" port. If " V-" is connected as Grounding, make sure to short the GND and V- ports.



#### 2. Remote ON/OFF Control

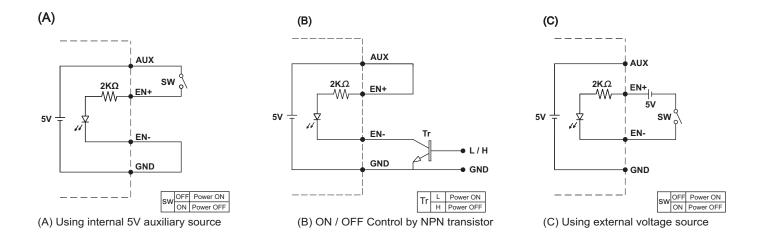

#### 3. Remote Sense

