

ATC SERIES
10 Watts
KEY FEATURES

- Switching Power Module for PCB Mountable
- Fully Encapsulated Plastic Case
- Universal Input Range 90-264VAC, 47-440 Hz
- Regulated Output
- Low Ripple and Noise
- Screw Terminal For Optional
- CE, UL Approval
- 3-Year Product Warranty


ELECTRICAL SPECIFICATIONS

All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. (Single Output)		ATC-3.3S	ATC-5S	ATC-12S	ATC-15S	ATC-24S
Max Output Wattage (W)		10W	10W	10W	10W	10W
Input	Voltage	90-264 VAC or 120-370 VDC				
	Frequency (Hz)	47-440 Hz				
	Current (Full load)	200 mA max. (115 VAC) / 130 mA max. (230 VAC)				
	Inrush Current (<2ms)	10 A max. (115 VAC) / 20 A max. (230 VAC)				
	Leakage Current	0.75 mA max.				
	External Fuse (recommend)	1.5 A slow blow type				
Output	Voltage (V.DC.)	3.3V	5V	12V	15V	24V
	Voltage Accuracy	±2%				
	Current (mA) max	3000	2000	833	666	426
	Line Regulation (LL-HL) (typ.)	±0.5%				
	Load Regulation (5-100%) (typ.)	±1%				
	Minimum Load	4%	5%	5%	3%	5%
	Maximum Capacitive Load	70000 uF	35000 uF	11000 uF	7000 uF	2300 uF
	Ripple	<0.2% Vout +40mV max (Vp-p)				
	Noise	<0.5% Vout +50mV max (Vp-p)				
	Efficiency	65%	71%	76%	75%	76%
	Hold-up Time	15 ms min.				
	Switching Frequency	100 kHz				
Protection	Over Power Protection	Hiccup technique, auto-recovery				
	Over Voltage Protection	Zener diode clamp				
	Short Circuit Protection	Hiccup mode, indefinite (automatic recovery)				
Isolation	Input-Output (V.AC)	3000V				
	Input-FG (V.AC)	1500V				
	Output-FG (V.AC)	500V				
Environment	Operating Temperature	-25°C...+70°C (with derating)				
	Storage Temperature	-40°C...+85°C				
	Temperature Coefficient	±0.02%/°C				
	Humidity	95% RH				
	MTBF	>250,000 h @ 25°C (MIL-HDBK-217F)				
Physical	Dimension (L x W x H)	2.53 x 1.78 x 0.85 Inches (64.3 x 45.1 x 21.7 mm) Tolerance ±0.5 mm				
	Case Material	Plastic resin with Fiberglass (flammability to UL 94V-0)				
	Weight	92 g				
	Cooling Method	Free air convection				
Safety	Agency Approvals	UL/cUL, CE				
EMC	EMI (Conducted & Radiated Emission)	EN 55022 class B				
	EMS (Noise Immunity)	EN 50082-1				

ATC SERIES

10 Watts

ELECTRICAL SPECIFICATIONS


All specifications valid at normal input voltage, full load and +25°C after warm-up time unless otherwise stated.

Model No. (Dual Output)	ATC-5D	ATC-12D	ATC-15D
Max Output Wattage (W)	8W	10W	10W
Input	Voltage		
	90-264 VAC or 120-370 VDC		
	Frequency (Hz)		
	47-440 Hz		
	Current (Full load)		
	200 mA max. (115 VAC) / 130 mA max. (230 VAC)		
Output	Inrush Current (<2ms)		
	10 A max. (115 VAC) / 20 A max. (230 VAC)		
	Leakage Current		
	0.75 mA max.		
	External Fuse (recommend)		
	1.5 A slow blow type		
	Voltage (V.DC.)	±5V	±12V
	Voltage Accuracy	±2%	±15V
	Current (mA) max	±800	±380
	Line Regulation (LL-HL) (typ.)	±0.5%	±300
	Load Regulation (5-100%) (typ.)	±1%	±3000 uF
	Minimum Load	1%	3%
	Maximum Capacitive Load	±22000 uF	±2000 uF
	Ripple	<0.2% Vout +40mV max (Vp-p)	
Protection	Noise	<0.5% Vout +50mV max (Vp-p)	
	Efficiency	73%	74%
	Hold-up Time	15 ms min.	
Isolation	Switching Frequency	100 kHz	
	Over Power Protection	Hiccup technique, auto-recovery	
	Over Voltage Protection	Zener diode clamp	
Environment	Short Circuit Protection	Hiccup mode, indefinite (automatic recovery)	
	Input-Output (V.AC)	3000V	
	Input-FG (V.AC)	1500V	
Physical	Output-FG (V.AC)	500V	
	Operating Temperature	-25°C...+70°C (with derating)	
	Storage Temperature	-40°C...+85°C	
	Temperature Coefficient	±0.02%/°C	
	Humidity	95% RH	
Safety	MTBF	>250,000 h @ 25°C (MIL-HDBK-217F)	
	Dimension (L x W x H)	2.53 x 1.78 x 0.85 Inches (64.3 x 45.1 x 21.7 mm) Tolerance ±0.5 mm	
	Case Material	Plastic resin with Fiberglass (flammability to UL 94V-0)	
	Weight	92 g	
EMC	Cooling Method	Free air convection	
	Agency Approvals	UL/cUL, CE	
	EMI (Conducted & Radiated Emission)	EN 55022 class B	
Safety	EMS (Noise Immunity)	EN 50082-1	

NOTE


1. Ripple & Noise are measured at 20MHz of bandwidth with 0.1uF & 47uF parallel capacitor.
2. It's recommended to add Varistor 14S471K at L / N input side in parallel.

MECHANICAL DIMENSION (Top View)


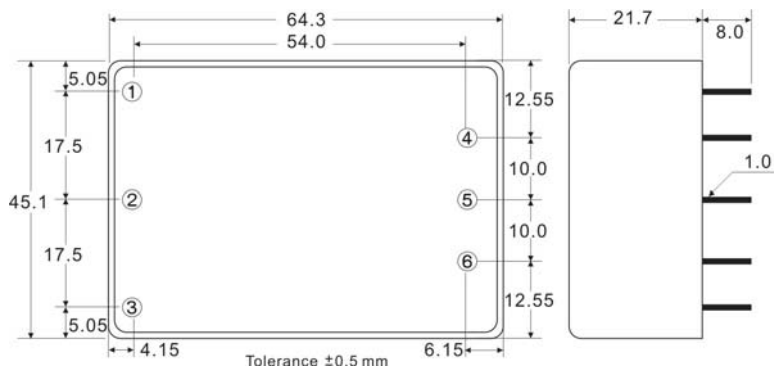


PIN#	Single	Dual
1	FG	FG
2	AC IN (N)	AC IN (N)
3	AC IN (L)	AC IN (L)
4	-DC OUT	-DC OUT
5	NO PIN	COMMON
6	+DC OUT	+DC OUT

BLOCK DIAGRAM

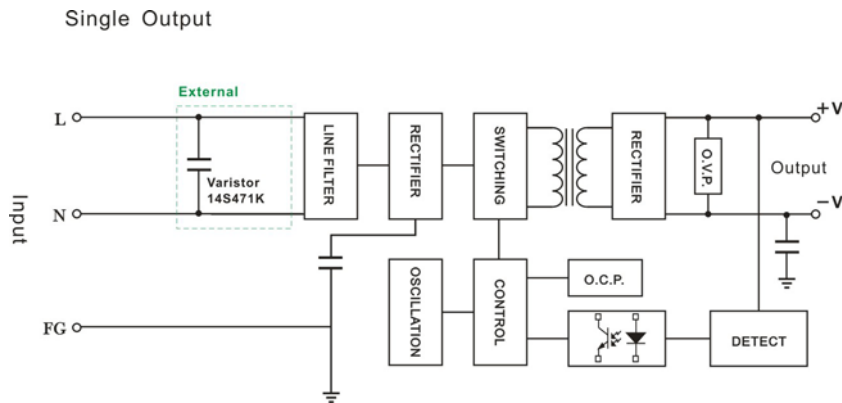


DERATING

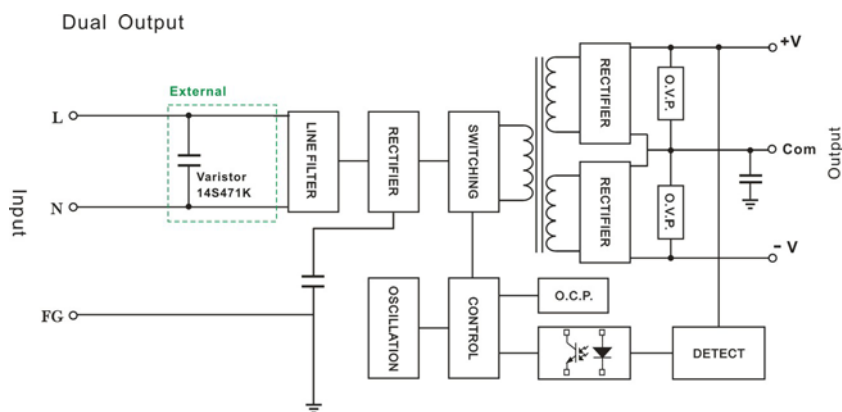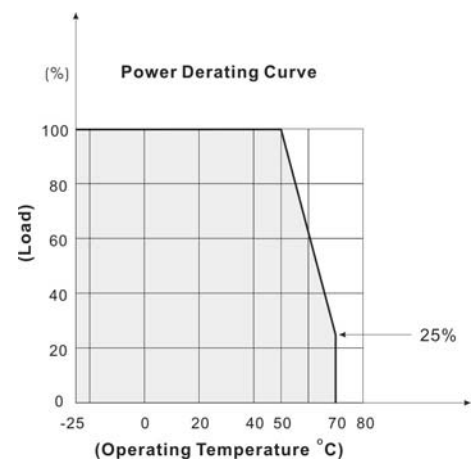

ATC SERIES
10 Watts
SCREW TERMINAL
ATC-A2


PIN#	Single	Dual
1	FG	FG
2	AC IN (N)	AC IN (N)
3	AC IN (L)	AC IN (L)
4.	NO CONNECT	NO CONNECT
5	-DC OUT	-DC OUT
6	NO CONNECT	COMMON
7	+DC OUT	+DC OUT
8	NO CONNECT	NO CONNECT

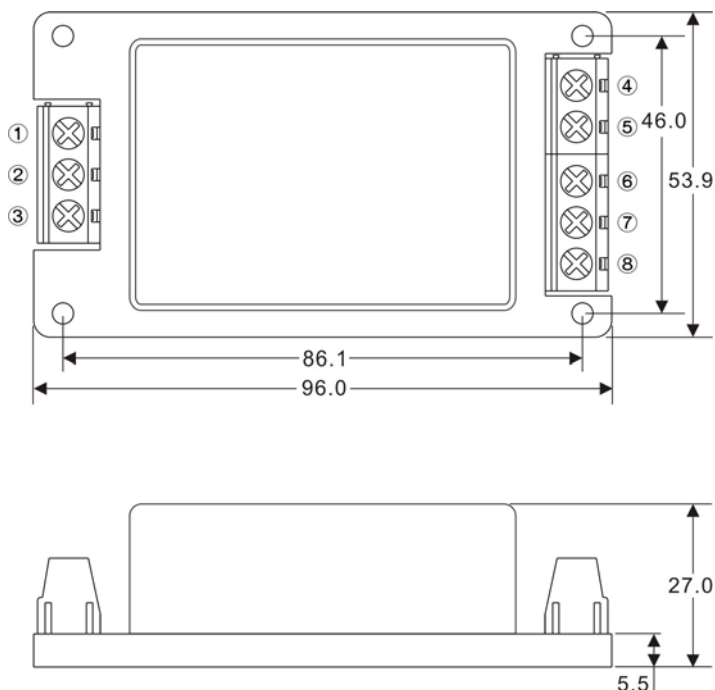
ATC-A5


PIN#	Single	Dual
1	FG	FG
2	AC IN (N)	AC IN (N)
3	AC IN (L)	AC IN (L)
4.	NO CONNECT	NO CONNECT
5	-DC OUT	-DC OUT
6	NO CONNECT	COMMON
7	+DC OUT	+DC OUT
8	NO CONNECT	NO CONNECT

